

Model: TFA 800 – Tube Axial



- General air movement
- Supply and Exhaust
- Smoke Spill & Fire service
- Dust Extraction

GT-Gulf (M) Sdn Bhd certifies that the model: TFA 800 – Tube Axial shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program



Casing

- · Casing of mild steel hot dipped galvanised
- Motor brackets/pedestals are bolted as standard (welded available)
- Optional: epoxy powder coating

Impeller


- Pitch adjustment is infinitely variable over a wide range typically 10° to 40°
- Standard blade construction is of high pressure die cast aluminium alloy
- Fan boss are taper lock bush

Motor

- Totally Enclosed, squirrel cage induction type
- Power supply: 3 phase 415V, 50 Hz
- Suitable for operating temperature range of -35°C to +40°C
- Class F insulation and IP54 protection
- Optional: High efficient, explosion proof


Accessories (optional)

- Inlet and discharge cones/guards
- Flexible connections
- Matching flanges
- Mounting feet
- Vibration isolation mounts
- Access panels
- External terminal box
- Variable speed controls
- Sound attenuators

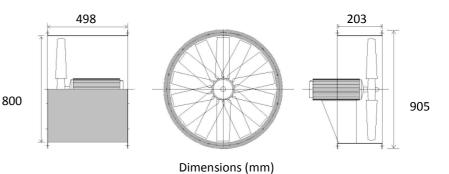

SERIES TFA 800

Impeller Code: 800/250 Size: 800 mm

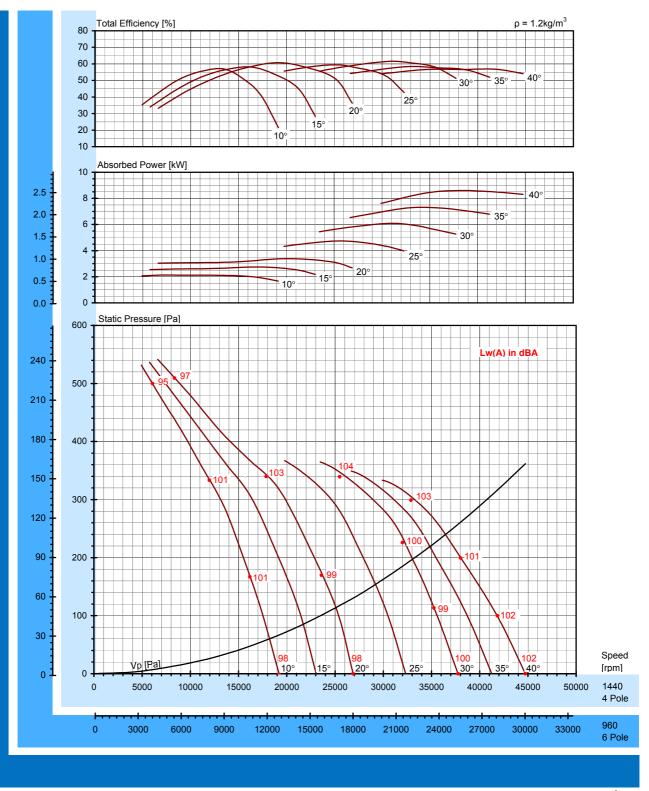

Air Volume [m³/h]

Peak Absorbed Power (kW)

reak Absorbed	i Fower (~vv)							
N (rpm)	Blade Pitch Angle							Lw(A) in	Lp(A) at
	10°	15°	20°	25°	30°	35°	40°	dBA	3m
960	0.63	0.81	1.00	1.40	1.80	2.16	2.55	-10	-30
motor	0.75	1.1	1.1	1.5	2.2	2.2	3		
1440	2.13	2.74	3.37	4.72	6.07	7.28	8.60	0	-20
motor	2.2	3	4	5.5	7.5	7.5	11	V	-20

* Performance certified is for installation type D - Ducted inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

*The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet LwiA sound power levels for installation type D: ducted inlet, ducted outlet. Ratings include the effects of duct end correction.







GT-GULF (M) SDN. BHD. (306488-X) Lot 9, Jalan 13/6, Petaling Jaya, Selangor, Malaysia Tel: 603-7957 0212 Fax: 603-7957 0398